

RN 高压限流熔断器


技术参数

型号	额定电压KV	额定开断电流 KA	额定电流 A	熔断件尺寸mm	熔断件重量kg	底座重量kg
RN1-6	6	20	2, 3, 5, 7.5, 10, 15, 20, 25	Φ54×310	1.1	3.9
			30, 40, 50, 60, 75	Φ70×360	2.3	3.9
			100, 150, 200	双管	4.6	3.9
RN3-6	6	20	2, 3, 5, 7.5, 10, 15, 20, 25, 30, 40, 50	Φ54×310	1.1	3.9
			60, 75, 100	Φ70×360	2.3	3.9
			150, 200	双管	4.6	3.9
RN1-10	10	12	2, 3, 5, 7.5, 10, 15, 20, 25	Φ54×410	1.5	4.1
			30, 40, 50	Φ70×460	3.0	4.1
			75, 100, 150	双管	6.0	4.1
RN3-10	10	12	2, 3, 5, 7.5, 10, 15, 20, 25, 30, 40,50	Φ54×410	1.5	4.1
			60, 75, 100	Φ70×460	3.0	4.1
			150, 200	双管	6.0	4.1
RN1-35	35	35	2, 3, 5, 7.5	Φ54×610	2.2	16.6
			10, 15	Φ70×660	4.2	16.6
RN3-35	35	3.5	2, 3, 5, 7.5, 10, 15	Φ54×610	2.2	16.6
			20, 25, 30, 40, 50	Φ70×660	4.2	16.6

外形及安装尺寸


单位: mm

■ RN1, RN3熔断器(单管)的外形及安装尺寸

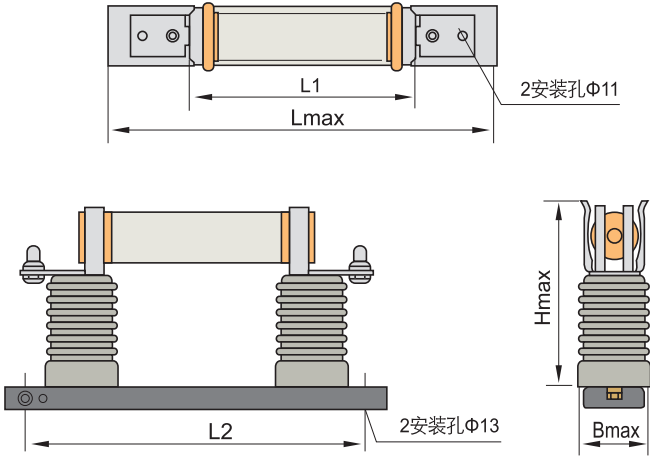

RN 系列高压限流熔断器

■ RN1,RN3熔断器(双管)的外形及安装尺寸

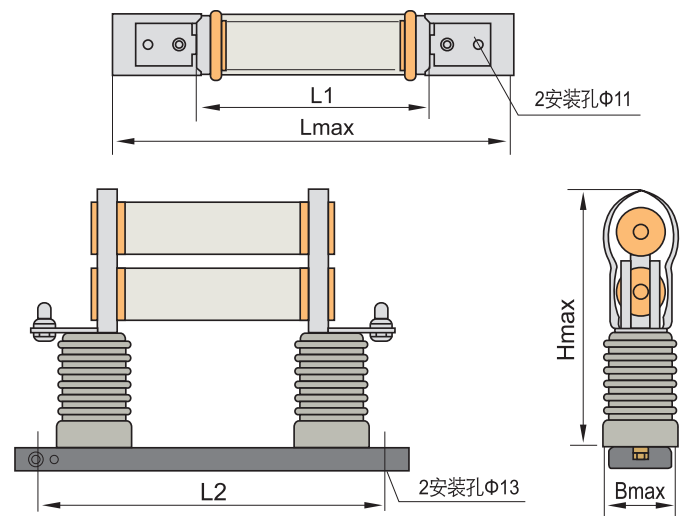

熔断器的外形及安装尺寸					
型号	外形及安装尺寸				
	Lmax	L1	L2	Hmax	Bmax
RN1-6/25	550	316	505	250	80
RN1-6/75	550	366	505	270	80
RN1-6/200	550	366	505	350	80
RN1-10/25	650	416	605	250	80
RN1-10/50	650	466	605	270	80
RN1-10/150	650	466	605	350	80
RN1-35/7.5	850	616	800	480	135
RN1-35/15	900	666	850	500	135
RN3-6/50	550	316	505	250	80
RN3-6/100	550	366	505	270	80
RN3-6/200	550	366	505	350	80
RN3-10/25	650	416	605	250	80
RN3-10/50	650	466	605	270	80
RN3-10/150	650	466	605	350	80
RN3-35/7.5	850	616	800	480	135
RN3-35/15	900	666	850	500	135

RN 系列高压限流熔断器

选型指南

产品名称	额定电压	类型	电流规格
RN1	6	T	200
RN1 RN3	6: 6kV 10: 10kV 35: 35kV	T: 熔断体	P5: 0.5A 200: 200A

注: RN1电流规格为0.5~200A; RN3电流规格为2~200A

产品名称	额定电压	类型	电流规格
RN1	6	Z	200
RN1 RN3	6: 6kV 10: 10kV 35: 35kV	Z: 底座	7P5: 7.5A 200: 200A

注: RN1底座电流规格为7.5~200A; RN3电流规格为15~200A

