

三相混合式步进电机
3-Phase Hybrid Stepping Motor
经济型 Econmic Type



60mm SIZE24HC

1.2° /Step

3Phase




规格参数 Speciflcations

以下电机可选购与外径57mm电机安装尺寸互换电机，型号表达方式为：240□HC46D8


电机型号 Motor Model	保持转矩 Holding Torque	工作电压 Working Voltage	额定电流 Rated Current	绕线电阻 Phase Resistance	绕线电感 Phase Inductance	转子惯量 Rotor Inertia	重 量 Motor Weight	长 度 Motor Length	推荐驱动器 Driver Model
2401HC45D8	1.00	≤60	4.5	0.5	0.8	280	0.58	56	CSD758R
2402HC45D8	1.25	≤60	4.5	0.7	1.2	380	0.85	64.5	CSD758R
2403HC45D8	1.50	≤60	4.5	0.8	1.5	440	1.15	76	CSD758R
2404HC45D8	1.75	≤60	4.5	1.0	2.5	580	1.41	90	CSD758R

注:以上推荐型号为标准型步进驱动器，另有经济型、网络型、开关控制型驱动器可供选配，设备选型请咨询我司工作人员。

外形尺寸 (单位: mm) Dimensions(Unit: mm)

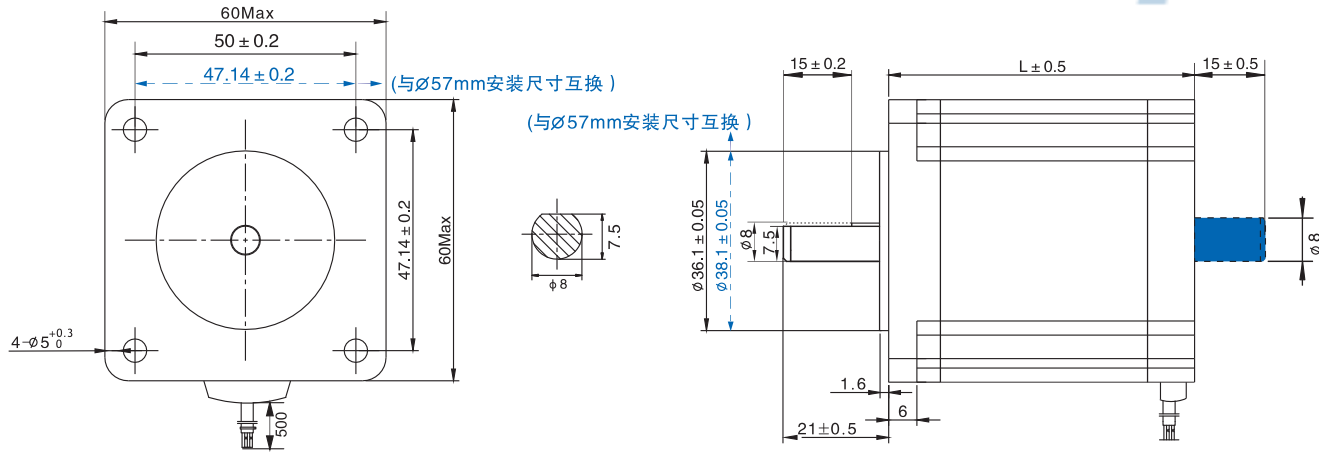

绕线图 Wire Connection




- 本尺寸适用于双出轴,忽略掉()部分则是单出轴类型。
This size is suitable for double shaft. After ignoring the()part, we called it single shaft.
- 出轴长度、出轴方式、出轴直径、引线长度可以根据客户需求订制。
The shaft length, axial mode, axial diameter and lead length can be customized.

矩频特性图 Dynamc Torque Curves


2401HC45D8/2401HC45D8-2

驱动型号: CSD758R 电压:48VDC 电流:4.5A/相 1000脉冲/圈

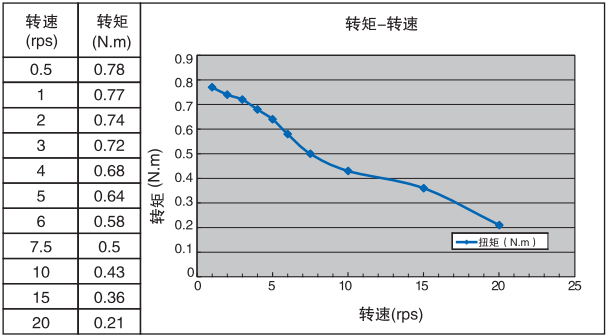


2402HC45D8/2402HC45D8-2

驱动型号: CSD758R 电压:48VDC 电流:4.5A/相 1000脉冲/圈

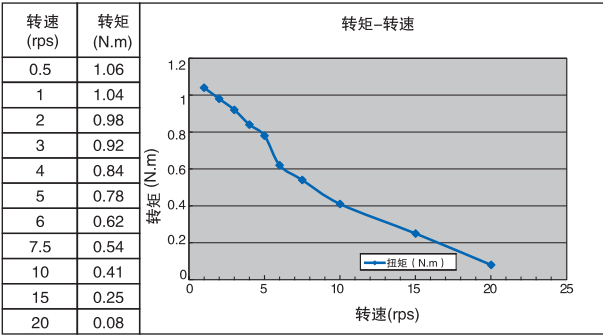

2403HC45D8/2403HC45D8-2

驱动型号: CSD758R 电压:48VDC 电流:4.5A/相 1000脉冲/圈

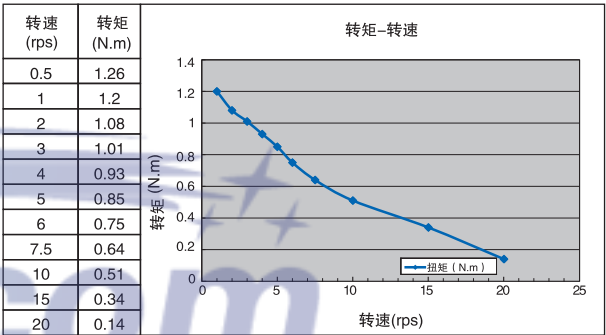

2404HC45D8/2404HC45D8-2

驱动型号: CSD758R 电压:48VDC 电流:4.5A/相 1000脉冲/圈

