



基本尺寸				基本额定载荷		极限转速		轴承代号	其他尺寸				接触面与倒角尺寸			计算系数				重量
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑		d2	D1	b	k	da	Da	ra	e	y1	y2	y0	
mm				KN		r/min			mm				mm							Kg
40	80	23	1.1	91.7	85.5	6000	7500	22208C/W33	50.4	68.9	5.5	2	47	73	1	0.28	2.40	3.50	2.50	0.523
	90	33	1.5	143	133	4500	5600	22308CA/W33	56	74	5.5	2.5	49	81	1.5	0.39	1.73	2.58	1.69	1.01
	90	33	1.5	143	133	4500	5600	22308C/W33	56	74	5.5	2.5	49	81	1.5	0.38	1.80	2.70	1.80	1.01
45	85	23	1.1	97	93.5	5300	6700	22209CA/W33	57.6	73	5.5	2	52	78	1	0.28	2.40	3.50	2.50	0.629
	100	36	1.5	174	174	3800	4800	22309C/W33	57.4	81.4			54	91	1.5	0.26	2.60	3.90	2.50	1.51
	100	36	1.5	174	174	3800	4800	22309CA/W33	63	81.4	5.5	2.5	54	91	1.5	0.38	1.80	2.60	1.70	1.52
50	90	23	1.1	98.8	103	5000	6300	22210CA/W33	62.2	81.6	5.5	2	57	83	1	0.26	2.60	3.90	2.50	0.630
	110	40	2	209	213	3400	4300	22310C/W33	62.9	90.6	5.5	2.5	61	100	2	0.38	1.80	2.70	1.80	1.96
	110	40	2	209	213	3400	4300	22310CA/W33	69	90.6	5.5	2.5	60	100	2	0.38	1.80	2.60	1.70	2.17
55	100	25	1.5	119	120	4500	5600	22211CA/W33	68.8	87.3	5.5	2	64	91	1.5	0.25	2.70	4.00	2.60	0.887
	100	25	1.5	119	121	4500	5600	22211C/W33	65.7	87.3	5.5	2	62	91	1.5	0.24	2.80	4.20	2.80	0.856
	120	43	2	257	266	3200	4000	22311C/W33	69	99.5	5.5	2.5	65	110	2	0.37	1.90	2.90	1.80	2.37
	120	43	2	257	266	3200	4000	22311CA/W33	75	99.5	5.5	2.5	65	110	2	0.37	1.80	2.70	1.80	2.60
60	110	28	1.5	148	158	4000	5000	22212CA/W33	75.2	95	5.5	2	69	101	1.5	0.24	2.80	4.20	2.80	1.01
	110	28	1.5	148	158	4300	5300	22212C/W33	75.5	95	5.5	2	69	101	1.5	0.24	2.80	4.20	2.80	1.11
	130	31	2.1	201	228	3400	4300	21312C/W33	87.8	115	5.5	3	72	118	2	0.22	3.00	4.60	2.80	2.08
	130	46	2.1	295	318	2800	3600	22312C/W33	81.4	108	5.5	3	72	118	2	0.37	1.90	2.90	1.80	3.25
	130	46	2.1	295	318	3000	3800	22312CA/W33	81.4	108	5.5	3	72	118	2	0.37	1.80	2.70	1.80	3.33
65	120	31	1.5	183	205	3800	4800	22213CA/W33	81.5	103	5.5	2.5	74	111	1.5	0.25	2.70	4.00	2.50	1.56
	120	31	1.5	183	205	3800	4800	22213C/W33	81.5	103	5.5	2.5	74	111	1.5	0.25	2.70	4.00	2.50	1.55
	140	48	2.1	323	342	2600	3400	22313C/W33	88.6	116	5.5	3	77	128	2	0.35	1.90	2.90	1.80	4.92
	140	48	2.1	323	342	2600	3400	22313CA/W33	88.6	116	5.5	3	77	128	2	0.35	1.90	2.90	1.80	4.92
70	125	31	1.5	198	217	3600	4500	22214CA/W33	86.8	109	6	2.5	79	116	1.5	0.24	3.00	4.60	2.80	1.83
	125	31	1.5	198	217	3600	4500	22214C/W33	86.8	109	6	2.5	79	116	1.5	0.24	3.00	4.60	2.80	1.63
	150	51	2.1	380	408	2200	3000	22314C/W33	95.8	125	8.3	4	82	138	2	0.35	1.90	2.90	1.80	4.48
	150	51	2.1	380	408	2200	3000	22314CA/W33	95.8	125	8.3	4	82	138	2	0.35	1.90	2.90	1.80	5.23
75	115	40	1.1	164	220	2900	3500	24015CA/W33	87.5	100	5.5	3	82	106	1	0.32	2.09	3.11	2.04	1.48
	130	31	1.5	201	228	3400	4300	22215CA/W33	92	114	5.5	2.5	84	121	1.5	0.24	3.00	4.60	2.80	1.71
	130	31	1.5	201	228	3400	4300	22215C/W33	92	114	5.5	2.5	84	121	1.5	0.24	3.00	4.60	2.80	1.71
	160	55	2.1	418	451	2200	3000	22315C/W33	101	133	8.3	4	87	148	2	0.35	1.90	2.90	1.80	5.39



基本尺寸				基本额定载荷		极限转速		轴承代号	其他尺寸				接触面与倒角尺寸			计算系数				重量
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑		d2	D1	b	k	da	Da	ra	e	y1	y2	y0	
mm				KN		r/min			mm				mm							Kg
	160	55	2.1	418	451	2200	3000	22315CA/W33	101	133	8.3	4	87	148	2	0.35	1.90	2.90	1.80	5.44
80	140	33	2	224	257	3200	4000	22216C/W33	95.1	122	5.5	2.5	91	129	2	0.22	3.00	4.60	2.80	2.10
	140	33	2	224	257	3200	4000	22216CA/W33	98.9	122	5.5	2.5	91	129	2	0.24	2.80	4.20	2.80	2.08
	170	58	2.1	466	513	2000	2800	22316C/W33	109	142	8.3	4	92	158	2	0.34	1.90	2.90	1.80	6.60
	170	58	2.1	466	513	2000	2800	22316CA/W33	109	142	8.3	4	92	158	2	0.34	1.99	2.96	1.94	7.47
85	150	36	2	271	309	2800	3600	22217C/W33	105	132	6.5	3	96	139	2	0.23	3.00	4.60	2.80	2.73
	150	36	2	271	309	3000	3800	22217CA/W33	105	132	6.5	3	96	139	2	0.24	2.80	4.20	2.80	2.69
	180	41	3	309	356	2000	2800	21317CA/W33	118	152	8.3	4	99	166	2.5	0.24	2.80	4.20	2.80	5.42
	180	60	3	523	589	1900	2600	22317C/W33	107	150	8.3	4	99	166	2.5	0.33	2.00	3.00	2.00	7.38
	180	60	3	523	589	1900	2600	22317CA/W33	115	150	8.3	4	99	166	2.5	0.34	1.99	2.96	1.94	8.19
90	140	50	1.5	233	390	2600	3400	24018CA/W33	106	121	5.5	3	100	125	1.5	0.33	2.00	3.00	2.00	3.25
	160	40	2	309	356	2600	3400	22218C/W33	106	139	8.3	2.5	101	149	2	0.23	2.80	4.20	2.80	4.50
	160	40	2	309	356	2600	3400	22218CA/W33	111	139	8.3	2.5	101	149	2	0.25	2.70	4.00	2.60	3.40
	160	52.4	2	337	418	1900	2600	23218CA/W33	112	136	5.5	2.5	101	149	2	0.25	2.70	4.00	2.60	4.82
	190	64	3	580	660	1800	2400	22318C/W33	113	159	8.3	5	104	176	2.5	0.35	2.00	3.00	2.00	10.1
	190	64	3	580	660	1800	2400	22318CA/W33	123	159	8.3	5	104	176	2.5	0.34	1.99	2.96	1.94	11.5
	190	43	3	580	660	2400	3200	21318CA/W33	112	150	8.3	4.5	104	176	2.5	0.24	2.80	4.20	2.80	5.82
95	170	43	2.1	361	428	2400	3200	22219C/W33	114	148	8.3	3	107	158	2	0.24	2.80	4.20	2.80	4.16
	170	43	2.1	361	428	2400	3200	22219CA/W33	119	148	8.3	3	107	158	2	0.24	2.80	4.20	2.80	4.68
	200	45	3	404	466	2400	3200	21319CA/W33	112	150	8.3	4.5	107	158	2	0.24	2.80	4.20	2.80	7.48
	200	67	3	637	727	1800	2400	22319C/W33	128	167	8.3	5	109	186	2.5	0.34	2.00	3.00	2.00	10.2
	200	67	3	637	727	1800	2400	22319CA/W33	128	167	8.3	5	109	186	2.5	0.34	1.99	2.96	1.94	10.5
100	150	37	1.5	206	325	2400	3200	23020C/W33	116	135	5.5	3	110	140	2	0.22	2.90	4.40	2.80	2.21
	150	50	1.5	271	394	2400	3200	24020CA/W33	115	133	5.5	3	110	140	2	0.30	2.25	3.35	2.20	3.18
	165	52	2	347	466	2000	2800	23120CA/W33	121	143	5.5	3	110	155	2	0.30	2.90	4.40	2.80	4.42
	165	52	2	347	466	2000	2800	23120C/W33	121	143	5.5	3	110	155	2	0.30	2.30	3.40	2.20	4.43
	180	46	2.1	404	466	2200	3000	22220C/W33	124	156	8.3	3	112	168	2	0.24	2.80	4.20	2.80	5.30
	180	46	2.1	404	466	2200	3000	22220CA/W33	124	156	8.3	3	112	168	2	0.24	2.80	4.20	2.80	5.18
	180	60.3	2.1	451	570	1700	2200	23220CA/W33	125	153	9.5	4	112	168	2	0.33	2.00	3.00	2.00	6.58
	215	73	3	774	903	1700	2200	22320C/W33	138	179	11.1	5	114	201	2.5	0.35	2.00	3.00	2.00	13.1
	215	73	3	774	903	1700	2200	22320CA/W33	138	179	11.1	5	114	201	2.5	0.35	1.90	2.90	1.80	13.8





基本尺寸				基本额定载荷		极限转速		轴承代号	其他尺寸				接触面与倒角尺寸			计算系数				重量
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑		d2	D1	b	k	da	Da	ra	e	y1	y2	y0	
mm				KN		r/min			mm				mm							Kg
105	175	56	2	402	550	1900	2700	23121CA/W33	127	151	5.5	3	115	165	2	0.31	2.20	3.30	2.20	5.35
	175	56	2	365	560	1900	2700	23121C/W33	127	151	5.5	3	115	165	2	0.30	2.20	3.30	2.20	5.36
110	170	45	2	295	418	2200	3000	23022CA/W33	128	150	7.5	3	120	160	2	0.25	2.70	4.00	2.60	3.54
	170	45	2	295	418	2200	3000	23022C/W33	128	150	7.5	3	120	160	2	0.24	2.90	4.40	2.80	3.68
	170	60	2	394	589	2100	2800	24022CA/W33	128	150	5.5	3	120	160	2	0.32	2.09	3.11	2.04	4.98
	180	56	2	409	556	1900	2600	23122C/W33	132	156	5.5	3	120	170	2	0.30	2.30	3.40	2.20	5.69
	180	56	2	409	580	1900	2600	23122CA/W33	132	156	5.5	3	120	170	2					573
	180	69	2	494	713	1000	1400	24122CA/W33	131	153	5.5	2.5	120	170	2	0.35	1.90	2.90	1.80	6.92
	200	53	2.1	530	610	2000	2800	22222C/W33	133	173	8.3	4	122	188	2	0.26	2.70	4.00	2.50	7.32
	200	53	2.1	530	610	2000	2800	22222CA/W33	139	173	8.3	4	122	188	2	0.26	2.60	3.90	2.50	7.43
	200	69.8	2.1	570	727	1600	2000	23222CA/W33	138	168	12	5	122	188	2	0.34	1.99	2.96	1.94	10.1
	200	69.8	2.1	570	720	1700	2200	23222/W33	139	168	12	5	122	188	2	0.35	1.90	2.90	1.80	9.54
	240	50	3	420	490	1600	2000	21322CA/W33	150	202	7.5	3								11.7
	240	80	3	900	727	1600	2000	22322C/W33	151	197	13.9	6	122	188	2.5	0.34	2.20	3.30	2.20	17.9
	240	80	3	900	1060	1600	2000	22322CA/W33	151	197	13.9	6	122	188	2.5	0.31	2.20	3.30	2.20	18.9
120	180	46	2	340	495	2000	2800	23024CA/W33	139	162	5.5	3	130	170	2	0.23	2.90	4.40	2.80	4.44
	180	60	2	410	640	1600	2000	24024CA/W33	139	158	5.5	4	130	170	2	0.31	2.20	3.30	2.20	5.83
	200	62	2	490	660	1800	2400	23124CA/W33	146	174	5.5	3	130	190	2	0.30	2.30	3.40	2.20	12.4
	200	62	2	490	660	1800	2400	23124C/W33	146	174	5.5	3	130	190	2	0.29	2.40	3.60	2.50	7.97
	200	80	2	623	900	1400	1800	24124CA/W33	146	167	5.5	3	130	190	2	0.30	2.30	3.40	2.20	10.6
	215	58	2.1	600	730	1900	2600	22224C/W33	149	187	11.1	4	132	203	2	0.25	2.60	3.90	2.50	9.78
	215	58	2.1	600	730	1900	2600	22224CA/W33	149	187	11.1	4	132	203	2	0.26	2.60	3.90	2.50	9.53
	215	76	2.1	660	880	1500	1900	23224CA/W33	150	182	8.3	5	132	203	2	0.35	1.90	2.90	1.80	12.1
	260	86	3	920	1060	1400	1800	22324C/W33	165	218	13.9	6	134	246	2.5	0.35	1.90	2.90	1.80	23.8
	260	86	3	920	1060	1400	1800	22324CA/W33	165	215	13.9	6	134	246	2.5	0.34	1.99	2.96	1.94	23.3
130	200	52	2	410	580	1900	2600	23026CA/W33	153	179	9.5	4	140	190	2	0.24	2.80	4.20	2.80	7.04
	200	52	2	410	580	1900	2600	23026C/W33	153	179	9.5	4	140	190	2	0.24	2.90	4.40	2.80	5.72
	200	69	2	510	770	1800	2400	24026CA/W33	151	175	5.5	3	140	190	2	0.32	2.09	3.11	2.04	7.76
	210	64	2	530	740	1700	2200	23126C/W33	156	183	8.3	4	140	200	2	0.28	2.40	3.50	2.50	9.56
	210	64	2	530	740	1700	2200	23126CA/W33	156	183	8.3	4	140	200	2	0.28	2.40	3.50	2.50	10.7
	210	80	2	650	950	1700	2200	24126CA/W33	153	180	8.3	4	140	200	2	0.35	1.90	2.90	1.80	10.6
	230	64	3	700	880	1800	2400	22226C/W33	162	200	10	5	144	216	2.5	0.26	2.50	3.70	2.50	11.5
	230	64	3	700	880	1800	2400	22226CA/W33	162	200	10	5	144	216	2.5	0.27	2.50	3.70	2.50	12.4
	230	80	3	740	1010	1300	1700	23226CA/W33	161	194	12	5	144	216	2.5	0.33	2.00	3.00	2.00	15.9



基本尺寸				基本额定载荷		极限转速		轴承代号	其他尺寸				接触面与倒角尺寸			计算系数				重量
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑		d2	D1	b	k	da	Da	ra	e	y1	y2	y0	
mm				KN		r/min			mm				mm							Kg
140	280	93	4	1060	1250	1300	1700	22326C/W33	178	232	16.7	6	148	262	3	0.34	1.90	2.90	1.80	24.8
	280	93	4	1060	1250	1300	1700	22326CA/W33	178	232	16.7	6	148	262	3	0.34	1.99	2.96	1.94	18.3
	210	53	2	440	650	1800	2400	23028CA/W33	162	188	8.3	4.5	150	200	2	0.23	2.90	4.40	2.80	6.70
	210	53	2	440	650	1800	2400	23028C/W33	162	188	8.3	4.5	150	200	2	0.22	3.00	4.60	2.80	6.31
	210	69	2	540	860	1800	2400	24028CA/W33	162	188	5.5	3	150	200	2	0.30	2.30	3.40	2.20	8.31
	225	68	2.1	600	860	1600	2000	23128CA/W33	166	196	8.3	5	152	213	2	0.29	2.30	3.50	2.40	10.9
	225	68	2.1	600	860	1600	2000	23128C/W33	166	196	8.3	5	152	213	2	0.28	2.40	3.60	2.50	10.7
	225	85	2.1	730	1100	850	1100	24128CA/W33	165	192	8.3	4.5	152	213	2	0.37	1.80	2.70	1.80	13.4
	250	68	3	670	860	1700	2200	22228CA/W33	176	218	11.1	5	154	236	2.5	0.26	2.60	3.90	2.50	16.2
	250	68	3	670	860	1700	2200	22228C/W33	176	218	11.1	5	154	236	2.5	0.26	2.60	3.90	2.50	14.5
	250	88	3	870	1190	1200	1600	23228CA/W33	173	215	15	6	154	236	2.5	0.33	2.00	3.00	2.00	19.7
	300	102	3.7	1230	1480	1100	1500	22328C/W33	191	249	16.7	7	158	282	3	0.34	1.90	2.90	1.80	35.2
	300	102	4	1230	1480	1100	1500	22328CA/W33	191	249	16.7	7	158	282	3	0.35	1.90	2.90	1.80	36.2
	150	225	56	2.1	485	710	1700	2200	23030C/W33	174	201	8.3	4.5	162	213	2	0.22	3.00	4.60	2.80
225		56	2.1	485	710	1700	2200	23030CA/W33	174	201	8.3	4.5	162	213	2	0.22	3.00	4.60	2.80	8.01
225		75	2.1	620	990	1300	1700	24030CA/W33	175	196	5.5	3	162	213	2	0.31	2.20	3.30	2.20	9.39
250		80	2.1	790	1140	1400	1800	23130C/W33	173	216	11.1	5	162	238	2	0.30	2.30	3.40	2.20	16.2
250		80	2.1	790	1140	1400	1800	23130CA/W33	182	216	11.1	5	162	238	2	0.30	2.30	3.40	2.20	16.5
250		100	2.1	970	1450	800	1000	24130CA/W33	180	208	8.3	4.5	162	238	2	0.37	1.80	2.70	1.80	19.2
270		73	3	810	1030	1600	2000	22230C/W33	179	234	12	6	164	256	2.5	0.26	2.60	3.90	2.50	18.6
270		73	3	810	1030	1600	2000	22230CA/W33	189	234	12	6	164	256	2.5	0.26	2.60	3.90	2.50	18.7
270		96	3	1030	1390	1100	1500	23230CA/W33	188	228	11.1	6	164	256	2.5	0.35	1.90	2.90	1.80	26.6
320		108	4	1390	1670	1000	1400	22330CA/W33	203	265	16.7	9	168	302	3	0.36	1.87	2.79	1.83	41.5
160		240	60	2.1	555	840	1700	2200	23032C/W33	180	216	11.1	4	172	228	2	0.22	3.00	4.60	2.80
	240	60	2.1	555	840	1700	2200	23032CA/W33	186	216	8.3	5	172	228	2	0.22	3.00	4.60	2.80	10.0
	240	80	2.1	710	1140	1100	1500	24032CA/W33	183	209	8.3	5	172	228	2	0.30	2.30	3.40	2.20	13.2
	270	86	2.1	930	1300	1300	1700	23132CA/W33	188	234	13.9	6	172	258	2	0.30	2.30	3.40	2.20	21.9
	270	86	2.1	930	1300	1300	1700	23132C/W33	188	234	13.9	6	172	258	2	0.30	2.30	3.40	2.20	21.9
	270	86	2.1	930	1300	1300	1700	23132/W33	193	231	13.9	6	172	258	2					21
	270	86	2.1	930	1300	1300	1700	23132C/W33	193	231	13.9	6	172	258	2	0.34	1.99	2.96	1.94	22.2
	270	109	2.1	1120	1670	1200	1600	24132CA/W33	193	225	8.3	4	172	258	2	0.40	1.69	2.51	1.65	24.6
	270	109	2.1	1120	1670	1200	1600	24132C/W33	193	225	8.3	4	172	258	2	0.40	1.69	2.51	1.65	24.8
	290	80	3	960	1230	1200	1500	22232C/W33	201	249	13.9	5	174	276	2.5	0.27	2.50	3.70	2.50	22.8
	290	104	3	1160	1580	1000	1400	23232C/W33	201	244	13.9	7		276	2.5	0.35	1.90	2.90	1.80	30.0



基本尺寸				基本额定载荷		极限转速		轴承代号	其他尺寸				接触面与倒角尺寸			计算系数				重量
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑		d2	D1	b	k	da	Da	ra	e	y1	y2	y0	
mm				KN		r/min			mm				mm							Kg
170	290	104	3	1160	1580	1000	1400	23232CA/W33	189	244	13.9	7	174	276	2.5	0.35	1.90	2.90	1.80	30.2
	340	114	4	1520	1860	950	1300	22332C/W33	189	284	16.7	7	178	322	3	0.35	1.90	2.90	1.80	51.6
	340	114	4	1520	1860	950	1300	22332CA/W33	201	284	16.7	7	178	322	3	0.35	1.90	2.90	1.80	51.6
	260	67	2.1	670	1000	1600	2000	23034CA/W33	198	231	11.1	5	182	248	2	0.23	2.90	4.40	2.80	14.1
	260	67	2.1	670	1000	1600	2000	23034C/W33	192	231	11.1	5	182	248	2	0.23	2.90	4.40	2.80	13.6
	260	90	2.1	885	1390	1000	1400	24034CA/W33	198	227	8.3	4	182	248	2	0.33	2.00	3.00	2.00	17.8
	280	88	2.1	990	1450	1200	1600	23134C/W33	190	243	13.9	6	182	268	2	0.30	2.30	3.40	2.20	21.4
	280	109	2.1	1160	1770	1200	1600	24134CA/W33	203	237	8.3	5	182	268	2	0.37	1.80	2.70	1.80	24.8
	310	86	4	1060	1390	1300	1700	22234CA/W33	215	268	16.7	6	188	292	3	0.27	2.50	3.70	2.50	26.8
310	86	4	1060	1390	1300	1700	22234C/W33	215	268	16.7	6	188	292	3	0.27	2.50	3.70	2.50	29.2	
310	110	4	1330	1830	1000	1300	23234CA/W33	214	261	13.9	7	188	292	3	0.34	1.99	2.96	1.94	37.7	
360	120	4	1670	2050	950	1200	22334CA/W33	231	299	16.7	7	188	342	3	0.34	1.99	2.96	1.94	62.6	
180	250	52	2	410	790	1700	2200	23936CA/W33	204	230	9.5	4	190	240	2	0.18	3.80	5.60	3.60	7.34
	280	74	2.1	790	1190	1400	1800	23036CA/W33	214	247	13.9	7.5	192	268	2	0.25	2.70	4.00	2.60	17.7
	280	74	2.1	790	1190	1400	1800	23036C/W33	214	247	13.9	7.5	192	268	2	0.25	2.70	4.00	2.60	17.1
	280	100	2.1	1030	1640	1200	1300	24036CA/W33	210	242	8.3	4	192	268	2	0.33	2.00	3.00	2.00	26.6
	300	96	3	1140	1670	1100	1500	23136CA/W33	216	259	13.9	6	194	286	2.5	0.30	2.30	3.40	2.20	27.1
	300	96	3	1140	1670	1100	1500	23136C/W33	216	259	13.9	6	194	286	2.5	0.30	2.30	3.40	2.20	26.3
	300	118	3	1330	2050	950	1300	24136CA/W33	212	252	11.1	6	194	286	2.5	0.37	1.80	2.70	1.80	33.0
	320	86	4	1120	1480	1300	1700	22236CA/W33	224	278	16.7	6	198	302	3	0.26	2.60	3.90	2.50	29.4
	320	86	4	1120	1480	1300	1700	22236C/W33	224	278	16.7	6	198	302	3	0.26	2.60	3.90	2.50	29.9
	320	112	4	1430	2010	900	1200	23236CA/W33	222	271			198	302	3	0.35	1.90	2.90	1.80	38.7
	380	126	4	1900	2330	900	1200	22336CA/W33	242	316	22.3	8	198	362	3	0.34	1.99	2.96	1.94	72.2
	380	126	4	1900	2330	900	1200	22336C/W33	242	316	22.3	8	198	362	3	0.34	1.99	2.96	1.94	69.6
	190	260	52	2	390	760	1600	2000	23938CA/W33	213	238	5.5	3	202	248	2	0.18	3.80	5.60	3.60
290		75	2.1	820	1270	1300	1700	23038CA/W33	224	259	13.9	5	202	278	2	0.23	2.90	4.40	2.80	17.3
290		100	2.1	1060	1710	950	1300	24038CA/W33	219	252			202	278	2	0.31	2.20	3.30	2.20	22.9
320		104	3	1300	1980	1000	1400	23138CA/W33	232	276	13.9	7	204	306	2.5	0.31	2.20	3.30	2.20	34.3
320		128	3	1520	2380	800	1200	24138CA/W33	226	267	11.1	6	204	306	2.5	0.40	1.69	2.51	1.65	41.9
340		92	4	1210	1620	1200	1600	22238CA/W33	235	293			208	322	3	0.26	2.60	3.90	2.50	37.4
340		92	4	1210	1620	1200	1600	22238C/W33	235	293	16.7	6	208	322	3	0.26	2.60	3.90	2.50	37.9
340		120	4	1580	2280	850	1100	23238CA/W33	237	288	16.7	7	208	322	3	0.35	1.90	2.90	1.80	44.8
400		132	5	2010	2520	850	1100	22338CA/W33	257	334	22.3	8	212	378	4	0.34	1.99	2.96	1.94	82.2
400		132	5	2010	2520	850	1100	22338C/W33	257	334	22.3	8	212	378	4	0.34	1.99	2.96	1.94	81.9

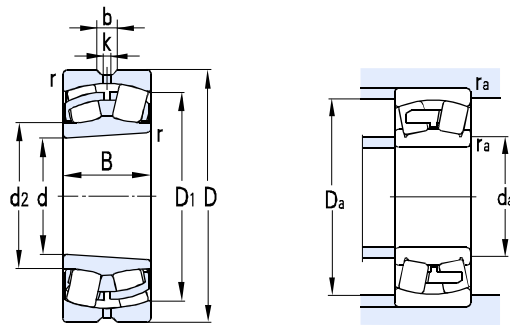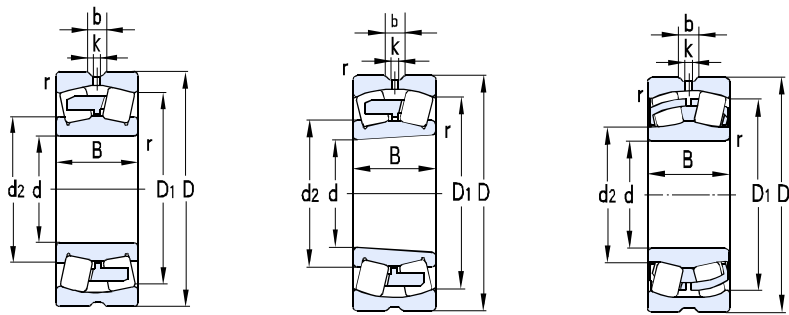

基本尺寸				基本额定载荷		极限转速		轴承代号	其他尺寸				接触面与倒角尺寸			计算系数				重量
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑		d2	D1	b	k	da	Da	ra	e	y1	y2	y0	
mm				KN		r/min			mm				mm							Kg
200	280	60	2.1	520	990	1600	2000	23940CA/W33	226	254	9.5	4	212	268	2	0.19	3.61	5.38	3.53	12.1
	310	82	2.1	950	1450	1200	1600	23040CA/W33	237	276	13.9	7.5	212	298	2	0.25	2.70	4.00	2.60	22.6
	310	82	2.1	950	1450	1200	1600	23040C/W33	237	276	13.9	7.5	212	298	2	0.25	2.70	4.00	2.60	23.3
	310	109	2.1	1230	2010	1000	1200	24040CA/W33	233	268	11.1	5	212	298	2	0.33	2.00	3.00	2.00	31.3
	340	112	3	1520	2240	950	1300	23140CA/W33	243	292	16.7	7	214	326	2.5	0.31	2.20	3.30	2.20	43.8
	340	140	3	1710	2660	900	1000	24140CA/W33	242	283	11.1	6	214	326	2.5	0.40	1.70	2.50	1.60	52.1
	360	98	4	1390	1830	1100	1500	22240CA/W33	250	309	16.7	6	218	342	3	0.26	2.60	3.90	2.50	44.7
	360	128	4	1770	2570	850	1100	23240CA/W33	249	304	16.7	8	218	342	3	0.35	1.90	2.90	1.80	53.4
	420	138	5	2200	2760	850	1100	22340CA/W33	269	350			222	398	4	0.34	1.99	2.96	1.94	96.7
	420	138	5	2200	2760	850	1100	22340C/W33	269	350	22.3	8	222	398	4	0.34	1.99	2.96	1.94	92
220	300	60	2.1	520	1030	1500	1900	23944CA/W33	242	278	8.3	4	232	288	2	0.18	3.80	5.60	3.60	12.9
	340	90	3	1160	1770	1100	1500	23044CA/W33	260	303	13.9	6	234	326	2.5	0.24	2.80	4.20	2.80	32
	340	118	3	1480	2470	850	1100	24044CA/W33	257	295	11.1	5	234	326	2.5	0.33	2.00	3.00	2.00	39.1
	370	120	4	1710	2610	900	1200	23144CA/W33	268	320	16.7	7	238	352	3	0.30	2.30	3.40	2.20	54.7
	370	120	4	1730	2610	900	1200	22244CA/W33	268	320	16.7	7	238	352	3	0.30	2.30	3.40	2.20	54.7
	370	150	4	2010	3180	800	1000	24144CA/W33	262	308	11.1	6	238	352	3	0.40	1.70	2.50	1.60	66.4
	400	108	4	1670	2240	950	1300	22244CA/W33	275	344	16.7	8	238	382	3	0.27	2.50	3.70	2.50	63.5
	400	144	4	2240	3280	900	1100	23244CA/W33	272.5	334	16.7	8	238	382	3	0.36	1.89	2.81	1.85	77.3
	460	145	5	2570	3280	850	1000	22344CA/W33	293.5	384.5	22.3	12	246	422	4	0.32	2.09	3.11	2.04	119
240	320	60	2.1	535	1100	1300	1700	23948CA/W33	266	295	9.5	4	252	308	2	0.15	4.50	6.70	4.50	15
	360	92	3	1230	1980	1000	1400	23048CA/W33	278	322	13.9	6	254	346	2.5	0.24	2.80	4.20	2.80	34
	400	128	4	1980	3040	850	1100	23148CA/W33	289	345	16.7	8	258	382	3	0.31	2.21	3.29	2.16	68.2
	400	128	4	1980	3040	850	1100	23148C/W33	289	345	16.7	8	258	382	3	0.31	2.21	3.29	2.16	64.8
	400	160	4	2280	3705	480	600	24148CA/W33	285	336	11.1	6	258	382	3	0.40	1.70	2.50	1.60	79
	440	120	4	2090	2850	900	1200	22248CA/W33	290	383	18	7	258	422	3	0.27	2.50	3.70	2.50	85.3
	440	160	4	2950	3800	670	850	23248CA/W33	292	369	22.3	8	258	422	3	0.35	1.90	2.90	1.80	102
	500	155	5	2950	3800	650	800	22348CA/W33	330	390	22.3	12	297	439	4	0.32	2.09	3.11	2.04	148
250	360	75	2.1	902	1750	1100	1500	23952CA/W33	294	328	12	6	272	348	2	0.18	3.80	5.60	3.60	21.6
260	360	75	2.1	836	1710	1100	1500	23952CA/W33	287	331	8.3	4.5	271	348	2	0.18	3.80	5.60	3.60	24.3
	400	104	4	1520	2420	900	1200	23052CA/W33	306	357	16.7	7	278	382	3	0.23	2.90	4.40	2.80	49.8
	400	104	4	1520	2420	900	1200	23052C/W33	306	357	16.7	7	278	382	3	0.23	2.90	4.40	2.80	47.8
	400	140	4	1940	3280	700	900	24052CA/W33	300	347	11.1	6	278	382	3	0.33	2.00	3.00	2.00	66.7
	440	144	4	2420	3700	800	1000	23152CA/W33	310	379	16.7	9	278	422	3	0.31	2.20	3.30	2.20	88.9



基本尺寸				基本额定载荷		极限转速		轴承代号	其他尺寸				接触面与倒角尺寸			计算系数				重量
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑		d2	D1	b	k	da	Da	ra	e	y1	y2	y0	
mm				KN		r/min			mm				mm							Kg
	440	180	4	2850	4560	430	530	24152CA/W33	312	366	13.9	8	278	422	3	0.39	1.73	2.58	1.69	115
	480	130	5	2520	3370	850	1100	22252CA/W33	330	414	22.3	12	282	458	4	0.27	2.51	3.74	2.45	106
	480	174	5	3090	4510	630	800	23252CA/W33	320	404	22.3	8	282	458	4	0.35	1.90	2.90	1.80	141
	540	165	6	3370	4320	630	800	22352CA/W33	349	455	22.3	8	288	512	5	0.31	2.20	3.30	2.20	186
	540	165	6	3370	4320	630	800	22352C/W33	349	455	22.3	8	288	512	5	0.31	2.20	3.30	2.20	185
280	350	52	2	435	1230	1200	1500	23856CA/W33	305	328	8.3	4.5	278	348	2	0.13	5.36	7.98	5.24	11.4
	380	75	2.1	800	1670	1000	1400	23956CA/W33	316	346	12	6	292	368	2	0.18	3.80	5.66	3.72	25.7
	420	106	4	1640	2700	850	1100	23056CA/W33	323	377			298	402	3	0.23	2.91	4.40	2.84	56.8
	420	106	4	1640	2700	850	1100	23056C/W33	323	377	16.7	7	298	402	3	0.23	2.91	4.40	2.84	53.9
	420	140	4	2050	3610	670	850	24056CA/W33	317	366	11.1	6	298	402	3	0.31	2.20	3.30	2.20	69.2
	460	146	5	2520	4040	800	950	23156CA/W33	333	400	16.7	8	302	438	4	0.30	2.30	3.40	2.20	104
	460	180	5	2950	4850	750	950	24156CA/W33	327	388	13.9	8	302	438	4	0.40	1.70	2.50	1.60	119
	500	130	5	2570	3560	800	1000	22256CA/W33	347	435	22.3	8	302	478	4	0.26	2.60	3.90	2.50	118
	500	176	5	3090	4660	630	750	23076CA/W33	340	424			302	478	4	0.35	1.90	2.90	1.80	147
	500	176	5	3090	4660	630	750	23256CA/W33	340	424	22.3	8	302	478	4	0.35	1.90	2.90	1.80	146
	580	175	6	3800	4940	600	750	22356CA/W33	364	485	22.3	8	308	552	5	0.30	2.30	3.40	2.20	221
300	380	60	3	625	1520	950	1400	23860CA/W33	328	357	12	6	310	368	2	0.13	5.20	7.70	5.00	18.2
	420	90	3	1140	2380	950	1300	23960CA/W33	339	382	15	6	314	406	2.5	0.19	3.60	5.30	3.60	40.1
	420	118	3	1140	2380	950	1200	24960CA/W33	339	376	18	7							36.5	
	460	118	4	2010	3280	800	1000	23060CA/W33	351	409	16.7	9	318	442	3	0.23	2.90	4.40	2.80	75.8
	460	160	4	2570	4510	600	750	24060CA/W33	342	399	13.9	7	318	442	3	0.32	2.09	3.11	2.04	99
	460	160	4	2570	4510	600	750	24060C/W33	342	399	13.9	7	318	442	3	0.32	2.09	3.11	2.04	97.3
	500	160	5	3040	4850	670	850	23160CA/W33	356	433	16.7	9	322	478	4	0.30	2.30	3.40	2.20	126
	500	200	5	3560	5990	600	750	24160CA/W33	356	420	13.9	6	322	478	4	0.39	1.75	2.61	1.71	161
	540	140	5	3030	4040	750	950	22260CA/W33	374	467			322	518	4	0.26	2.60	3.90	2.50	138
	540	192	5	3700	5560	530	670	23260CA/W33	373	455	22	10	322	518	4	0.35	1.90	2.90	1.80	190
320	400	60	2.1	670	1620	920	1280	23864CA/W33	346	376	13.9	6	332	388	2	0.12	5.60	8.40	5.60	20.5
	440	90	3	1360	2570	900	1200	23964CA/W33	360	402	15	6	338	426	2.5	0.18	3.80	5.60	3.60	19.4
	480	121	4	2130	3610	800	1000	23064CA/W33	368	431	16.7	8	338	462	3	0.23	2.90	4.40	2.80	84.8
	480	160	4	2710	4850	560	700	24064CA/W33	368	421	22	8	338	462	3	0.32	2.09	3.11	2.04	105
	480	160	4	2710	4850	560	700	24064C/W33	354	423	22	8	335	465	3	0.32	2.09	3.11	2.04	97.9
	540	176	5	3560	5700	630	800	23164CA/W33	389	465	22.3	8	342	518	4	0.31	2.20	3.30	2.20	200
	540	210	5	4040	6750	340	430	24164CA/W33	364	455	16.7	9	342	518	4	0.40	1.70	2.50	1.60	206
	580	150	5	3420	4660	670	850	22264CA/W33	400	502	22.3	8	342	558	4	0.26	2.60	3.90	2.50	175



基本尺寸				基本额定载荷		极限转速		轴承代号	其他尺寸				接触面与倒角尺寸			计算系数				重量
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑		d2	D1	b	k	da	Da	ra	e	y1	y2	y0	
mm				KN		r/min			mm				mm							Kg
340	580	150	5	3420	4660	700	900	22264/W33	400	502	22.3	8	342	558	4	0.27	2.50	3.70	2.50	177
	580	208	5	4180	6370	500	630	23264CA/W33	400	490	24	10	342	558	4	0.35	1.90	2.90	1.80	253
	670	200	7.5	4530	6820	450	600	22364CA/W33	430	566	22.3	12	342	645	6					344
	460	90	3	1390	2660	900	1200	23968CA/W33	378	423	15	6	354	446	2.5	0.17	4.00	5.90	4.00	46
	520	133	5	2570	4320	700	900	23068CA/W33	400	464	22.3	8	362	498	4	0.24	2.80	4.20	2.80	115
	520	180	5	3280	5890	530	670	24068CA/W33	394	451	16.7	8	362	498	4	0.33	2.00	3.00	2.00	137
	520	180	5	3280	5890	530	670	24068C/W33	377	453	16.7	9	358	502	4	0.33	2.00	3.00	2.00	139
	580	190	5	4040	6460	600	750	23168CA/W33	412	497	22.3	8	362	558	4	0.31	2.20	3.30	2.20	211
	580	243	5	5040	8220	320	400	24168CA/W33	408	486	22.3	10	362	558	4	0.4	1.7	2.5	1.6	261
620	224	6	4850	7410	430	530	23268CA/W33	426	528			368	592	5	0.35	1.90	2.90	1.80	297	
360	480	90	3	1330	2610	850	1100	23972CA/W33	403	441	11.1	6	374	466	2.5	0.16	4.20	6.30	4.00	46.6
	540	134	5	2610	4560	670	850	23072CA/W33	419	486	22.3	8	382	518	4	0.23	2.90	4.40	2.80	126
	540	134	5	2610	4560	670	850	23072C/W33	419	486	22.3	8	382	518	4	0.23	2.90	4.40	2.80	108
	540	180	5	3370	6220	600	750	24072CA/W33	398	474	16.7	8	382	518	4	0.31	2.2	3.3	2.2	150
	600	192	5	4090	6600	560	700	23172CA/W33	434	518	22.3	12	382	578	4	0.30	2.30	3.40	2.20	255
	600	243	5	5320	8840	300	380	24172CA/W33	430	511	20	12	382	578	4	0.37	1.80	2.70	1.80	270
	650	170	6	4090	5890	380	480	22272CA/W33	449	563	22.3	8	388	622	5	0.26	2.60	3.87	2.54	253
	650	232	6	5130	7880	400	500	23272CA/W33	443	547	22.3	10	388	622	5	0.35	1.90	2.90	1.80	335
	750	224	7.5	4900	8600	400	500	22372CA/W33	471	631	22.3	12	392	720	6	0.31	2.21	3.29	2.16	468
380	520	106	4	1860	3610	800	1000	23976CA/W33	426	476	15	10	398	502	3	0.17	4.00	5.90	4.00	69.9
	560	135	5	2760	4750	630	800	23076CA/W33	441	505	22.3	8	402	538	4	0.22	3.00	4.60	2.80	130
	560	180	5	3420	6460	480	600	24076CA/W33	435	494	22	10	402	538	4	0.3	2.3	3.4	2.2	151
	560	180	5	3420	6460	480	600	24076C/W33	435	494	16.7	9	402	538	4	0.3	2.3	3.4	2.2	152
	620	194	5	4180	6750	400	500	23176CA/W33	457	540	22	8	402	598	4	0.30	2.30	3.40	2.20	250
	620	243	5	5420	9310	300	380	24176CA/W33	457	540	22	8	402	598	4	0.30	2.30	3.40	2.20	296
	680	240	6	5560	8690	380	480	23276CA/W33	468	574	22.3	10	408	652	5	0.35	1.90	2.90	1.80	389
400	540	106	4	1900	3700	750	950	23980CA/W33	445	497	15	10	418	522	3	0.17	4.00	5.90	4.00	72.9
	600	148	5	3090	5420	600	750	23080CA/W33	460	538			422	578	4	0.23	2.90	4.40	2.80	161
	600	200	5	4090	7600	450	560	24080CA/W33	458	524	22	12	422	578	4	0.30	2.30	3.40	2.20	203
	650	200	6	4420	7270	380	480	23180CA/W33	480	568	22.3	8	428	622	5	0.28	2.40	3.60	2.50	275
	650	250	6	5890	10070	320	400	24180CA/W33	476	563	22.3	8	428	622	5	0.36	1.87	2.79	1.83	325
	720	256	6	6220	9880	340	430	23280CA/W33	499	606	22	10	428	692	5	0.35	1.90	2.90	1.80	350
	820	243	7.5	7130	9880	340	430	22380CA/W33	520	694	22.3	12	442	790	6	0.31	2.21	3.29	2.16	623



基本尺寸				基本额定载荷		极限转速		轴承代号	其他尺寸				接触面与倒角尺寸			计算系数				重量
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑		d2	D1	b	k	da	Da	ra	e	y1	y2	y0	
mm				KN		r/min			mm				mm							Kg
420	520	75	2.1	950	2630	750	950	23884CA/W33	454	490	13.9	5	430	504	2	0.12	5.60	8.40	5.60	35.9
	560	106	4	1950	3950	700	900	23984CA/W33	464	517	16.7	9	435	545	3	0.16	4.20	6.30	4.00	73.6
	620	150	5	3230	5700	450	560	23084CA/W33	484	558			442	598	4	0.22	3.00	4.60	2.80	150
	620	200	5	4180	7880	380	480	24084CA/W33	479	548	22.3	12	442	598	4	0.30	2.30	3.40	2.20	202
	700	224	6	5320	8800	360	450	23184CA/W33	505	605	22.3	12	448	672	5	0.30	2.30	3.40	2.20	353
	700	280	6	7000	11950	300	380	24184CA/W33	497	599	22.3	12	448	674	5	0.38	1.80	2.60	1.70	436
	760	272	7.5	7000	11000	320	400	23284CA/W33	525	643	22	12	456	724	6	0.35	1.90	2.90	1.80	550
440	600	118	4	2400	4850	450	560	23988CA/W33	492	553	16.7	8	462	578	3	0.17	4.00	5.90	4.00	101
	650	157	6	3470	6220	430	530	23088CA/W33	507	585	22.3	8	468	622	5	0.22	3.00	4.60	2.80	185
	650	212	6	4560	8700	360	450	24088CA/W33	502	569	22.3	12	468	626	5	0.30	2.30	3.40	2.20	251
	720	226	6	5700	9500	340	430	23188CA/W33	522	626	22.3	12	468	692	5	0.30	2.30	3.40	2.20	377
	720	280	6	7130	12500	300	380	24188CA/W33	517	618	22.3	12	468	692	5	0.37	1.80	2.70	1.80	436
	790	280	7.5	7410	11880	320	400	23288CA/W33	548	675	22.3	12	472	578	6	0.35	1.90	2.90	1.80	611
	460	580	118	3	1700	4655	450	560	24892CA/W33	504	540	15	6	472	566	2.5	0.17	4.00	5.90	4.00
620		118	4	2370	4750	430	530	23992CA/W33	511	572	16.7	9	475	605	3	0.16	4.20	6.30	4.00	105
680		163	6	3710	6600	400	500	23092CA/W33	531	613	23.5	12	488	652	5	0.22	3.00	4.60	2.80	229
680		218	6	4940	9500	340	430	24092CA/W33	528	600	24	12	488	652	5	0.29	2.35	3.50	2.30	304
760		240	7.5	6080	10260	320	400	23192CA/W33	557	660	22	8	496	724	6	0.30	2.30	3.40	2.20	443
760		300	7.5	7900	13870	160	200	24192CA/W33	540	639	22.3	8	496	724	6	0.37	1.80	2.70	1.80	461
830		296	7.5	8100	13000	300	380	23292CAKF3/W33	566	698	22.3	10	496	794	6	0.35	1.90	2.90	1.80	698
480	600	90	3	1350	3560	450	600	23896CA/W33	523	563			500	580	2.5	0.13	5.36	7.98	5.24	60.4
	650	128	5	2760	5400	400	500	23996CA/W33	532	596	16.7	10	502	628	4	0.18	3.80	5.60	3.60	126
	700	165	6	3700	6450	380	480	23096CA/W33	552	634	22.3	12	504	678	5	0.21	3.20	4.80	3.20	217
	700	165	6	3700	6450	400	500	23096F3/W33	553	625	22.3	12	504	678	5	0.23	2.90	4.40	2.80	247
	700	218	6	5050	9900	340	430	24096CA/W33	542	618	22.3	12	504	678	5	0.28	2.40	3.60	2.50	296
	870	310	7.5	8850	14250	260	340	23296CA/W33	581	732	22.3	12	516	834	6	0.35	1.90	2.90	1.80	853
500	620	90	3	1400	3800	420	520	238/500CA/W33	542	586	16.7	8	512	606	2.5	0.12	5.60	8.40	5.60	66
	670	128	5	2750	5700	400	500	239/500CA/W33	555	619	22.3	12	522	648	4	0.17	4.00	5.90	4.00	120
	720	167	6	3950	7400	380	480	230/500CA/W33	568	653	22.3	12	528	692	5	0.21	3.20	4.80	3.20	228
	720	218	6	5230	10450	420	520	240/500CA/W33	565	645	22.3	12	523	698	5	0.26	2.60	3.90	2.50	297
	830	264	7.5	7270	12260	320	400	231/500CA/W33	603	726	22.3	12	536	794	6	0.30	2.30	3.40	2.20	588
	830	325	7.5	9310	16150	300	380	241/500CA/W33	588	712	22.3	12	531	798	6	0.37	1.80	2.70	1.80	719



基本尺寸				基本额定载荷		极限转速		轴承代号	其他尺寸				接触面与倒角尺寸			计算系数				重量
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑		d2	D1	b	k	da	Da	ra	e	y1	y2	y0	
mm				KN		r/min			mm				mm							Kg
530	650	118	3	1750	5000	380	480	248/530CA/W33	573	612	22	8	543	636	2.5	0.15	4.50	6.70	4.50	91
	710	136	5	3050	6350	360	450	239/530CA/W33	586	658	22.3	12	548	690	4	0.17	4.00	5.90	4.00	150
	780	185	6	4850	8850	340	430	230/530CA/W33	614	703	24	12	558	752	5	0.22	3.00	4.60	2.80	328
	780	250	6	6370	12550	280	360	240/530CA/W33	605	691	22.3	12	553	758	5	0.29	2.30	3.50	2.40	416
	870	272	7.5	7750	13300	260	340	231/530CA/W33	635	762	22.3	12	560	837	6	0.30	2.30	3.40	2.20	665
	870	335	7.5	10100	18050	190	280	241/530CA/W33	622	748	22.3	12	560	837	6	0.37	1.80	2.80	1.80	846
	980	355	9.5	10500	19300	210	290	232/530CA/W33	656	818	22.3	12	565	932	8	0.36	1.87	2.79	1.83	1220
	560	750	140	5	3280	6850	340	430	239/560CA/W33	621	693	22.3	12	582	728	4	0.16	4.20	6.30	4.00
820		195	6	5300	9700	320	410	230/560CA/W33	644	741	22.3	9	588	792	5	0.22	3.14	4.67	3.07	360
820		258	6	7000	13900	220	300	240/560CA/W33	640	721	22.3	12	585	798	5	0.28	2.40	3.60	2.50	471
920		280	7.5	8700	15200	240	320	231/560CA/W33	677	803	22.3	12	596	884	6	0.30	2.30	3.40	2.20	756
920		355	7.5	11400	20500	120	160	241/560CA/W33	634	796	22.3	12	596	884	6	0.37	1.80	2.80	1.80	973
1030		365	9.5	10900	21000	190	260	232/560CA/W33	705	877	22.3	12	600	990	8	0.35	1.90	2.90	1.80	1380
600		800	150	5	3700	7850	320	400	239/600CA/W33	668	742	22.3	12	622	778	4	0.17	4.00	5.90	4.00
	800	200	5	5700	10800	320	400	249/600CAF1/W33	666	728	22.3	12	622	760	4	0.22	3.00	4.60	2.80	287
	870	200	6	5700	10800	300	380	230/600CA/W33	685	787	22.3	9	628	842	5	0.22	3.00	4.60	2.80	431
	870	272	6	7750	16150	220	300	240/600CA/W33	682	770	22.3	12	628	850	5	0.30	2.30	3.40	2.80	551
	870	272	6	7750	16150	240	320	240/600/W33	680	770	22.3	12	628	850	5	0.30	2.30	3.40	2.20	550
	980	300	7.5	9700	17100	180	250	231/600CAF3/W33	717	855	22.3	12	660	996	6	0.29	2.30	3.50	2.40	894
	980	375	7.5	10950	22450	110	150	241/600CA/W33	709	827	22	8	636	944	6	0.36	1.90	2.82	1.85	1151
	1090	388	9.5	12450	24250	190	260	232/600CA/W33	750	920			700	1000	8	0.35	1.93	2.88	1.80	1570
628	920	212	7.5	5600	12800	260	340	230/628CAF3/W33	721	831	22.3	9	666	884	6	0.21	3.20	4.80	3.20	481
630	780	112	4	2100	5800	300	380	238/630CAF3/W33	682	738	16.7	9	645	765	3	0.12	5.60	8.40	5.60	124
	820	112	4	2200	6300	270	350	238/670CA/W33	722	778	16.7	9	686	805	3	0.11	6.10	9.10	6.30	136
	820	150	4	3100	9600	270	350	248/670CA/W33	716	771	16.7	9	686	805	3	0.16	4.20	6.30	4.00	315
	850	165	6	4400	9300	280	360	239/630CA/W33	705	786	22.3	12	658	822	5	0.17	4.00	5.90	4.00	220
	920	212	7.5	6400	11900	260	340	230/630CAF3/W33	721	831	22.3	9	666	884	6	0.21	3.20	4.80	3.20	471
	920	290	7.5	7350	17100	220	300	240/630/W33	722	815	22.3	10	666	884	6	0.30	2.30	3.40	2.20	661
	1030	315	7.5	9950	19700	180	250	231/630CA/W33	756	918	22.3	12	668	996	6	0.30	2.30	3.40	2.20	1080
	1030	400	7.5	12100	25700	160	210	241/630CA/W33	736	885	22.3	12	662	996	6	0.37	1.80	2.70	1.80	1440
670	900	170	6	4750	10200	260	340	239/670CAF3/W33	743	831	22.3	12	692	876	5	0.17	4.00	5.90	4.00	313
	980	230	7.5	7300	13390	240	310	230/670CA/W33	760	885	22.3	12	706	944	6	0.22	3.00	4.60	3.20	604



基本尺寸				基本额定载荷		极限转速		轴承代号	其他尺寸				接触面与倒角尺寸			计算系数				重量
d	D	B	rsmin	Cr	Cor	脂润滑	油润滑		d2	D1	b	k	da	Da	ra	e	y1	y2	y0	
mm				KN		r/min			mm				mm							Kg
	980	308	7.5	9500	19300	190	270	240/670CA/W33	760	866	22.3	12	700	952	6	0.28	2.40	3.60	2.50	807
	1090	336	7.5	10350	21300	175	240	231/670CA/W33	801	958	22.3	12	700	1056	6	0.30	2.30	3.40	2.20	1280
	1090	412	7.5	13100	27500	150	190	241/670CA/W33	786	934	22.3	12	705	1056	6	0.36	1.87	2.79	1.83	1560
	1220	438	12	14650	29000	160	210	232/670CA/W33	832	1027	22.3	12	718	1170	10	0.35	1.90	2.90	1.80	2300
690	990	180	6	5500	11800	220	310	206/690CAF3/W33	780	907	22.3	12	705	975	5	0.16				461
	700	950	6	5000	11900	220	300	206/700CAF3/W33	780	877	13.3	12	715	935	5	0.16				378
710	870	118	4	2450	7100	260	340	238/710CAF3/W33	761	824	22.3	12	725	855	3	0.11	6.10	9.10	6.30	156
	950	180	6	5300	11400	240	310	239/710CA/W33	787	882	22.3	12	733	927	5	0.17	4.00	5.90	4.00	364
	950	243	6	6450	14800	200	280	249/710CAF1/W33X	791	864	22.3	12	733	927	5	0.22	3.00	4.60	2.80	500
	1030	236	7.5	7900	15500	220	300	230/710CAF3/W33	814	939	22.3	12	746	994	6	0.21	3.20	4.80	3.20	669
	1030	315	7.5	10010	21650	180	250	240/710CA/W33	806	918	22.3	12	738	1002	6	0.27	2.50	3.70	2.50	910
	1150	345	9.8	11600	24700	170	220	231/710CA/W33	851	1016	22.3	12	750	1110	8	0.28	2.40	3.60	2.50	1480
	1150	438	9.5	14450	30900	90	120	241/710CA/W33	838	982	22.3	12	754	1106	8	0.35	1.90	2.90	1.80	1801
	1280	450	12	16700	32700	160	210	232/710CA/W33	876	1096	22.3	12	758	1232	10	0.35	1.90	2.90	1.80	2640
750	920	128	5	2800	8100	240	310	238/750CA/W33	806	873	22.3	12	770	902	4	0.11	6.10	9.10	6.30	188
	920	170	5	3550	11000	220	300	248/750CA/W33	808	864	22.3	12	770	902	4	0.16	4.20	6.30	4.00	253
	1000	185	6	5700	12500	210	290	239/750CA/W33	831	930	22.3	12	772	976	5	0.16	4.20	6.30	4.00	414
	1000	250	6	7300	17100	180	250	249/750CA/W33	830	916	22.3	12	773	976	5	0.22	3.00	4.60	2.80	566
	1090	250	7.5	9200	17700	200	280	230/750CAF3/W33	847	987	22.3	12	786	1054	6	0.21	3.20	4.80	3.20	786
	1090	335	7.5	11200	23750	170	220	240/750CA/W33	852	970	22.3	12	779	1062	6	0.28	2.40	3.60	2.50	1100
	1220	365	9.5	13100	27500	160	210	231/750CA/W33	898	1080	22.3	12	798	1180	8	0.28	2.40	3.60	2.50	1760
	1220	475	9.5	16400	35600	130	170	241/750CA/W33	872	1039	22.3	12	792	1175	8	0.35	1.90	2.90	1.80	2195