


FHB31112	1.2	124.5	8.0	4.3	6000	5.0	HBQ30722A	19	平键 flat key	6x30	1.25	4.49
FHB31115		148	12	6.0	9720	6.6	HBQ30722A	19	平键 flat key	6x30	1.89	8.34
FHB31118		182	16	6.4	13560	9.0	HBQ30722A	19	平键 flat key	6x30	1.89	8.73
FHB31122		216	20	6.9	17400	11.1	HBQ30722A	19	平键 flat key	6x30	1.859	7.26


★ 以上仅为代表性产品，派生产品可根据客户要求制作！

Only the representation of the products, we can design according to clients' requirement.

◎ 外形图 (Dimension) : unit=mm

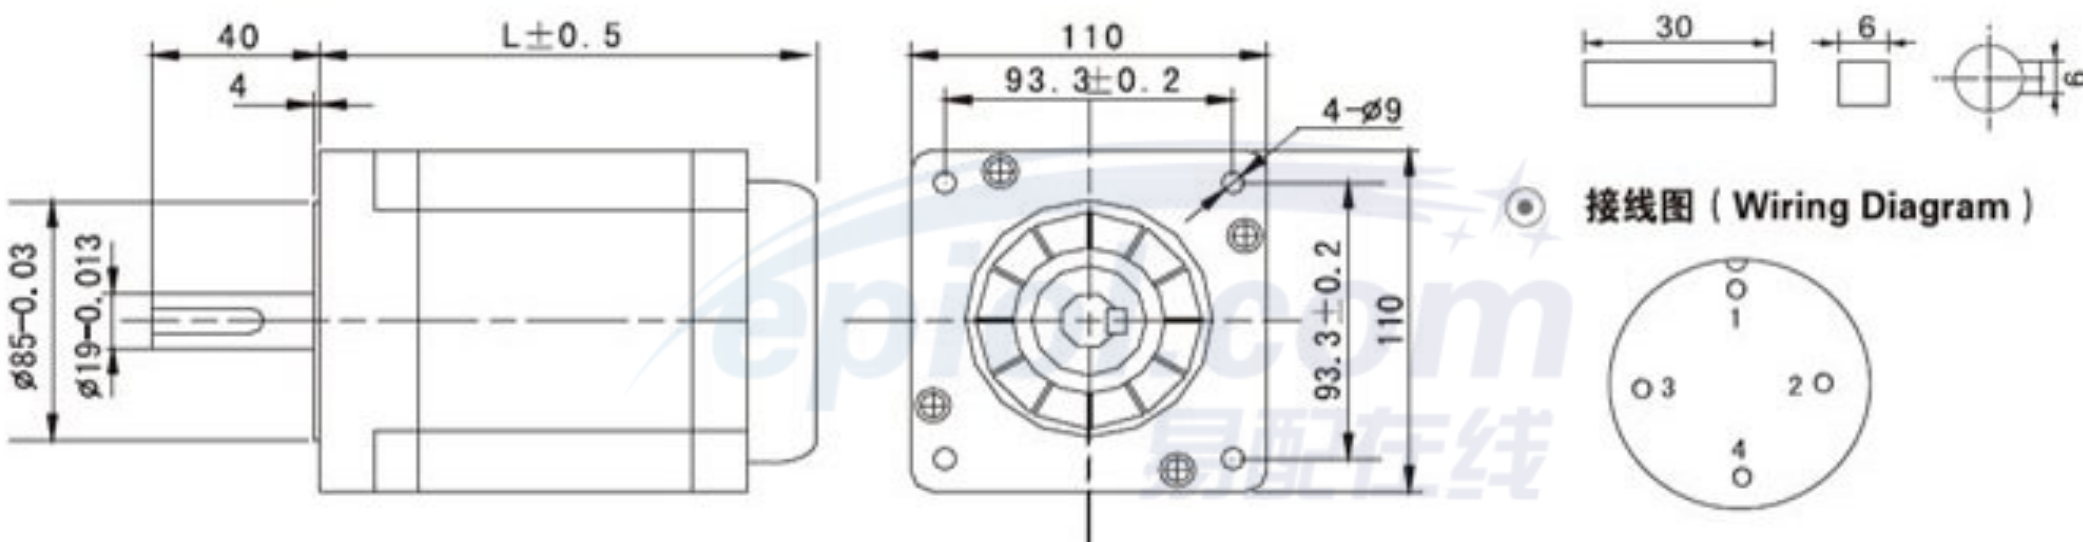

◎ 接线图 (Wiring Diagram)



序号 serial number	1	2	3	4	备注 remarks
相序 phase sequence	U	V	W	GND	四芯插座 four-core socket

◎ 矩频特性曲线图 (frequency-torque characteristics)



！ 注意事项

- 电机安装时务必用电机前端盖安装止口定位差配合，严格保证电机轴与负载的同心度。

Installation precaution: