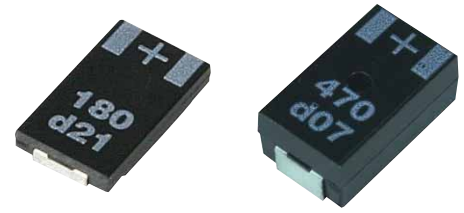


SLG SERIES
NEW
SWZ SW SERIES


◆FEATURES

- SLG : Ultra Low Profile
- SW:High Capacitance,Low ESR
- SWZ:High Capacitance,Ultra Low ESR
- RoHS Compliance
- Lead free reflow soldering is available
(260°C,10sec):(Available for MSL3)

◆SPECIFICATIONS

Series		SLG	SWZ	SW	
		1.1mm	1.9mm	2.7mm	2.9mm
Temperature Range(°C)		-55~+105°C			
Rated Voltage Range(V.DC)		2~6.3	2~10	2~8	2~6.3
Rated Cap Range(μF)		47~180	47~330	68~220	120~470
Capacitance Tolerance(20°C/120Hz)		±20%			
Leakage Current(after 5 minutes)(μA)		≤0.04CV			
(Tanδ) Dissipation Factor(20°C/120Hz)		≤0.1		≤0.1	
(ESR)mΩ Equivalent Series Resistance(ESR) (mΩ)(20°C/100kHz)		9~15	4.5~25	9~18	9
Maximum Allowable Ripple Current(mA r.m.s)(100kHz)		2,100~2,700	1,800~3,500	3,500 2,500(8V)	
Surge Voltage		Rated voltage ×1.25			
Endurance (105°C, 2000hrs, Rated Voltage applied)	ΔC	Within ±20% of the initial value			
	Tanδ	≤200% of initial specified value			
	LC	≤initial specified value			
Damp heat(Steady state) (60°C, 90%RH, 500hrs, No-applied voltage)	ΔC	Within -20%~+60% of the initial value		Within -20%~+40% of the initial value	
	Tanδ	≤200% of initial specified value			
	LC	≤300% of initial specified value			

◆STANDARD SIZE

Series	WV(V.DC)	Cap(μF)	Size(mm)			ESR(mΩ)	(mAr.m.s)	Part No.
			L	W	H			
SLG	2(d)	100	7.3	4.3	1.1	9	2,700	2SLG100M
		150	7.3	4.3	1.1	9	2,700	2SLG150M
		180	7.3	4.3	1.1	9	2,700	2SLG180M
	2.5(e)	100	7.3	4.3	1.1	9	2,700	2.5SLG100M
		150	7.3	4.3	1.1	9	2,700	2.5SLG150M
		180	7.3	4.3	1.1	9	2,700	2.5SLG180M
	4(g)	68	7.3	4.3	1.1	15	2,100	4SLG68M
	6.3(j)	47	7.3	4.3	1.1	15	2,100	6SLG47M
SWZ	2(d)	270	7.3	4.3	1.9	9	3,000	2SWZ270M R09
		270	7.3	4.3	1.9	6	3,500	2SWZ270M R06
		330	7.3	4.3	1.9	15	2,700	2SWZ330M R15
		330	7.3	4.3	1.9	9	3,000	2SWZ330M R09
		330	7.3	4.3	1.9	6	3,500	2SWZ330M R06
		330	7.3	4.3	1.9	4.5	3,500	2SWZ330M R05
	2.5(e)	220	7.3	4.3	1.9	9	3,000	2.5SWZ220M R09
		220	7.3	4.3	1.9	6	3,500	2.5SWZ220M R06
		270	7.3	4.3	1.9	9	3,000	2.5SWZ270M R09
		270	7.3	4.3	1.9	6	3,500	2.5SWZ270M R06
		330	7.3	4.3	1.9	15	2,700	2.5SWZ330M R15
		330	7.3	4.3	1.9	9	3,000	2.5SWZ330M R09
		330	7.3	4.3	1.9	6	3,500	2.5SWZ330M R06
		330	7.3	4.3	1.9	4.5	3,500	2.5SWZ330M R05
	4(g)	180	7.3	4.3	1.9	9	3,000	4SWZ180M R09
		220	7.3	4.3	1.9	9	3,000	4SWZ220M R09
	6.3(j)	120	7.3	4.3	1.9	9	3,000	6SWZ120M R09
		150	7.3	4.3	1.9	15	2,700	6SWZ150M R15
		150	7.3	4.3	1.9	9	3,000	6SWZ150M R09
	10(A)	47	7.3	4.3	1.9	25	1,800	10SWZ47M R25
SW	2(d)	220	7.3	4.3	2.7	9	3,500	2SW220M
		270	7.3	4.3	2.9	9	3,500	2SW270M
		330	7.3	4.3	2.9	9	3,500	2SW330M
		390	7.3	4.3	2.9	9	3,500	2SW390M
		470	7.3	4.3	2.9	9	3,500	2SW470M
		470	7.3	4.3	2.9	9	3,500	2SW470M
	2.5(e)	180	7.3	4.3	2.7	9	3,500	2.5SW180M
		220	7.3	4.3	2.9	9	3,500	2.5SW220M
		270	7.3	4.3	2.9	9	3,500	2.5SW270M
		330	7.3	4.3	2.9	9	3,500	2.5SW330M
	4(g)	150	7.3	4.3	2.7	9	3,500	4SW150M
		180	7.3	4.3	2.9	9	3,500	4SW180M
		220	7.3	4.3	2.9	9	3,500	4SW220M
		270	7.3	4.3	2.9	9	3,500	4SW270M
		330	7.3	4.3	2.9	9	3,500	4SW330M
		330	7.3	4.3	2.9	9	3,500	4SW330M
	6.3(j)	100	7.3	4.3	2.7	9	3,500	6SW100M
		120	7.3	4.3	2.9	9	3,500	6SW120M
		150	7.3	4.3	2.9	9	3,500	6SW150M
		180	7.3	4.3	2.9	9	3,500	6SW180M
		220	7.3	4.3	2.9	9	3,500	6SW220M
	8(k)	68	7.3	4.3	2.7	18	2,500	8SW68M
		100	7.3	4.3	2.7	18	2,500	8SW100M